

e-STUDIO2508A

e-STUDIO3008A

e-STUDIO3508A

e-STUDIO4508A

e-STUDIO5008A

Datasheet

- Five monochrome A3 systems with a speed of up to 50 ppm for businesses with demanding print, scan, copy, and fax needs.
- State-of-the-art technology combined with intuitive usage via a 22.9 cm tablet-like display, which can be customised according to a user's needs.
- Ideal for medium to large sized work-groups which need reliable document output and expect excellent image quality.

Every industry has unique workflow needs. Toshiba has developed customisable MFPs to make your job easier. Intuitive and smartly integrated, our products simplify complex tasks and give you control while providing the reliability Toshiba is known for.

The Toshiba e-STUDIO5008A series is designed to deliver fast and efficient high-quality documents. Equipped with advanced Toshiba e-BRIDGE controller technology, the series is presented in a new design.

Mobile printing is important and Toshiba's new systems give you full flexibility to do so. All models can easily connect to mobile devices via AirPrint, Google Cloud Print, or the Mopria Print Service.

All e-BRIDGE Next models fulfill the highest security standards to protect your data from unwanted access. So whether you are looking for document security, device security, or access security - our new systems have it all.



SPECIFICATIONS

General

Print & Copy Speed	A4: 25/30/35/45/50 ppm A3: 16/16/25/25/25 ppm
Warm-up Time	~ 14/14/16/16/16 seconds from low power mode
Paper Size & Weight	Cassettes: A5R-A3, 60-256 g/m ² Bypass: 100 x 148 mm-A3, 52-256 g/m ²
Paper Capacity	Cassettes: 2 x 550 sheets Bypass: 1 x 100 sheets max. 3,200 sheets
Inner Output Tray	550-sheet capacity
Automatic Duplex	A5R-A3, 60-256 g/m ²
Controller Type	Toshiba e-BRIDGE
Control Panel	22.9 cm (9") Multi-Touch Colour Panel
Memory	Toshiba Secure HDD 320 GB ²⁾ , 4 GB RAM
Interface	10Base-T/100Base-TX/1000Base-T, High Speed USB 2.0, WLAN ¹⁾ (IEEE802.11b/g/n), Bluetooth ¹⁾ , WiFi Direct ¹⁾
Dimensions & Weight	585 x 585 x 787 mm (W x D x H), ~ 58 kg
Starter-Kit	Drum

Print

Resolution	600 x 600 dpi (5 bit), 1,200 x 1,200 dpi (2 bit) equivalent to 3,600 x 1,200 dpi (PostScript driver only)
Page Description Language	PCL5e, PCL5c, PCL6 (PCL XL), XPS and PostScript 3 compatible
Supported Systems	Windows 10/8/7/Vista/Server 2008 (32/64 bit), Windows Server 2012/Server 2008 R2 (64 bit), Mac OS X 10.6.8-10.11, Linux/Unix, Citrix, Novell NetWare (NDPS), SAP, AS/400
Network Protocols	TCP/IP (IPv4/IPv6), IPX/SPX, EtherTalk, NetBios over TCP/IP
Mobile Printing	e-BRIDGE Print & Capture, AirPrint, Mopria Print Service, Google Cloud Print
Print Functions	Universal Printer Driver, Driver Templates, Print from USB, Hold print, Tandem printing

Scan

Resolution	max. 600 x 600 dpi
Scan Speed	Reversing Automatic Document Feeder (RADF) ¹⁾ : up to 73 ipm (300 dpi) in Colour and Monochrome Dual Scan Document Feeder (DSDF) ¹⁾ : up to 240 ipm (300 dpi) in Colour and Monochrome
Scan Modes	Auto-Colour (ACS), Colour, Greyscale, Monochrome
File Formats	JPEG, Multi/Single Page TIFF/XPS/PDF, SecurePDF, Slim PDF, PDF/A, Searchable PDF ¹⁾ (and other formats like DOCX, XLSX, RTF, TXT) ¹⁾
Scan Functions	WS Scan, Scan to USB, Scan to E-Mail, Scan to File (SMB, FTP, FTPS, IPX/SPX, Local), Meta Scan ¹⁾ , OCR Scan ¹⁾ , Scan to Box (e-Filing), WIA, TWAIN

Copy

Resolution	Scan: 600 x 600 dpi Print: 600 x 600 dpi (5 bit) equivalent to 2,400 x 600 dpi with smoothing
First Copy Output Time	~ 4.3/4.3/3.6/3.6/3.6 seconds
Zoom	Platen: 25-400%, RADF/DSDF ¹⁾ : 25-200%
Copy Modes	Text, Text/Photo, Photo, Colour Document, Custom
Copy Functions	Electronic Sort, Rotate Sort, Edge Erase, 2-in-1 / 4-in-1 mode

Fax¹⁾

Communication	Super G3, G3 - (opt. 2 nd line), Internet Fax T.37
Transmission Speed	~ 3 seconds per page
Compression	JBIG, MMR, MR, MH
Fax Memory	HDD: 1 GB Transmission/Reception
Network-Fax	Driver for Windows 10/8/7/Vista/Server 2008/Server 2003 (32/64 bit), Server 2012/Server 2008 (64 bit)
Incoming Fax Routing	To shared folders (SMB, FTP, IPX/SPX), E-Mail, e-Filing

System & Security

Device Management	e-BRIDGE Fleet Management System ¹⁾ , Top Access for remote administration and configuration
System Features	e-Filing document server for secure storage, Document distribution and Print-on-Demand (1 public box, 200 user boxes), 12,060 one-touch templates for storage of personalised settings or workflows, Scan/Fax Preview, e-BRIDGE Open Platform ¹⁾ , Embedded Web Browser, Job Skip
Accounting & Security	Role Based Access, LDAP support, 1,000 department & 10,000 user codes, Card Reader ¹⁾ , Private Print, Standard data encryption with Toshiba Secure HDD, Data Overwrite Enabler ¹⁾ , IP and MAC address filter, Port filter, Support of SSL and IPsec ¹⁾ protocols, IEEE802.1x support, IEEE2600.1 compliant ¹⁾ , Scan to Secure PDF



¹⁾ Optional

²⁾ 1 GB = 1 billion bytes; the actual formatted capacity is less.
Available capacity will also be less if software applications are pre-installed.

³⁾ For e-STUDIO2508A and e-STUDIO3008A only

OPTIONS

REVERSING AUTOMATIC DOCUMENT FEEDER – MR-3031

100-sheet capacity, A5R-A3, 35-157 g/m²

DUAL SCAN DOCUMENT FEEDER – MR-4000

300-sheet capacity, A5R-A3, 35-209 g/m²

PAPER FEED PEDESTAL – KD-1058

1 Cassette, 550-sheet capacity, A5R-A3, 60-256 g/m²

DRAWER MODULE – MY-1048

For Paper Feed Pedestal
1 Cassette, 550-sheet capacity
A5R-A3, 60-256 g/m²

ENVELOPE DRAWER – MY-1049 (can also be used for normal paper)

For Paper Feed Pedestal or 2nd Cassette
Envelopes: 50-envelope capacity,
100 x 162 mm - 240 x 380 mm, 60-85 g/m²
Paper: 1 Cassette, 550-sheet capacity
A5R-A4R, 60-256 g/m²

LARGE CAPACITY FEEDER – KD-1059A4

2,000-sheet capacity, A4, 64-105 g/m²

INNER FINISHER – MJ-1042

2 trays, 600-sheet capacity
50-sheet multi-position stapling
Staple mode: A4R-A3, 60-105 g/m²

MULTI-STAPLE FINISHER – MJ-1109

2 trays, 2,250-sheet capacity
50-sheet multi-position stapling
Staple mode: A4R-A3, 60-105 g/m²

SADDLE-STITCH FINISHER – MJ-1110

2 trays, 3,250-sheet capacity
50-sheet multi-position stapling
5-sheet center folding
Saddle-stitched booklets of up to 60 pages,
Staple mode: A4R-A3, 60-105 g/m²

HOLE PUNCH UNIT – MJ-6011E/MJ-6011F/MJ-6011S, MJ-6105E/MJ-6105F/MJ-6105S

Available in:
2 holes (E), 4 holes (F), 4 holes (S)

PLATEN COVER – KA-5005PC

DESK – MH-5005

HARD DISK DRIVE 320 GB²⁾ (FIPS 140-2 STANDARD) – GE-1230

JOB SEPARATOR – MJ-5015, MJ-5014³⁾

WORK TRAY – KK-5005

ACCESSORY TRAY – GR-1250

PANEL TEN-KEY OPTION – GR-1260

USB HUB³⁾ – GR-1270

FAX BOARD – GD-1370EU

WIRELESS LAN / BLUETOOTH MODULE (incl. WiFi Direct) – GN-4020

e-BRIDGE ID-GATE – TWN3/4

DATA OVERWRITE ENABLER – GP-1070

IPsec ENABLER – GP-1080

HARDCOPY SECURITY PRINTING KIT – GP-1190A

EMBEDDED OCR ENABLER – GS-1080, GS-1085


MULTI-STATION PRINT ENABLER – GS-1090, GS-1095

META SCAN ENABLER – GS-1010

UNICODE FONT ENABLER – GS-1007

ACCESSIBLE ARM – KK-2560

CONFIGURATION

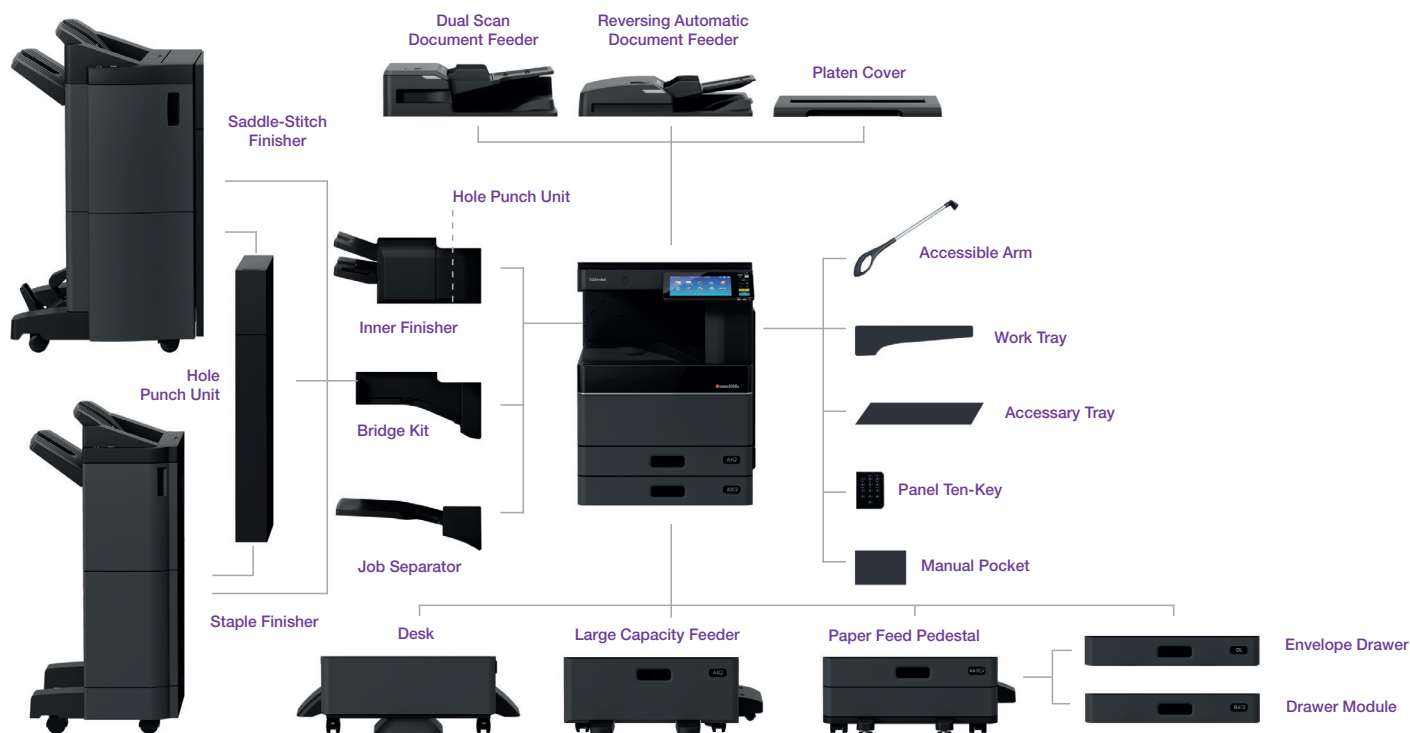

About Toshiba Tec

Toshiba Tec Germany Imaging Systems GmbH is part of the globally operating Toshiba Tec Corporation, active in various high-tech industrial sectors.

Toshiba Tec Corporation is a leading provider of information technology, operating across multiple industries - ranging from retail, education and business services to hospitality and manufacturing. With headquarters in Japan and over 80 subsidiaries worldwide, Toshiba Tec Corporation helps organisations transform the way they create, record, share, manage, and display information.

For more information please contact us:

Toshiba Tec Germany Imaging Systems GmbH

Carl-Schurz-Str. 7
41460 Neuss
Germany

Telephone

+49 2131-1245-0

Fax

+49 2131-1245-402

Website

<https://www.toshibatec.eu>

Together Information is Toshiba's vision for how people and organisations create, record, share, manage and display ideas and data.

It is based on our belief that the most successful organisations are those that communicate information in the most efficient way.

We make that possible through an integrated portfolio of industry specific solutions, all of which reflect Toshiba's commitment to the future of the planet.

